


## Fluid-o-Tech Syrup Pump

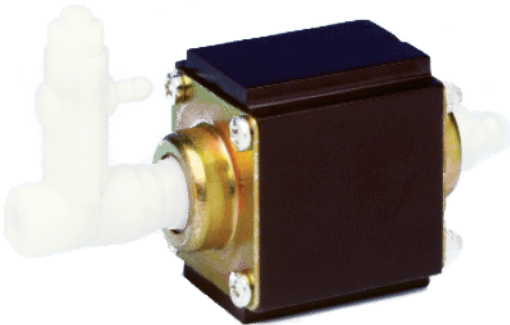


The Syrup version of the Fluid-o-Tech Mono oscillating piston pump has been carefully designed to deliver the same high performance as the Mono even with syrups with a viscosity up to 400 cSt.

The innovative sealing system and new piston are highly resistant to corrosion and mechanical wear and the improved precision of the flow regulator make this pump remarkable.

The coil is made of self-extinguishing material with a class H insulation winding.

All models are fitted with a noise suppression device which allows the pump to be installed in all those applications where low noise is a premium. Shock absorbing supports are available to reduce noise even further during operation.


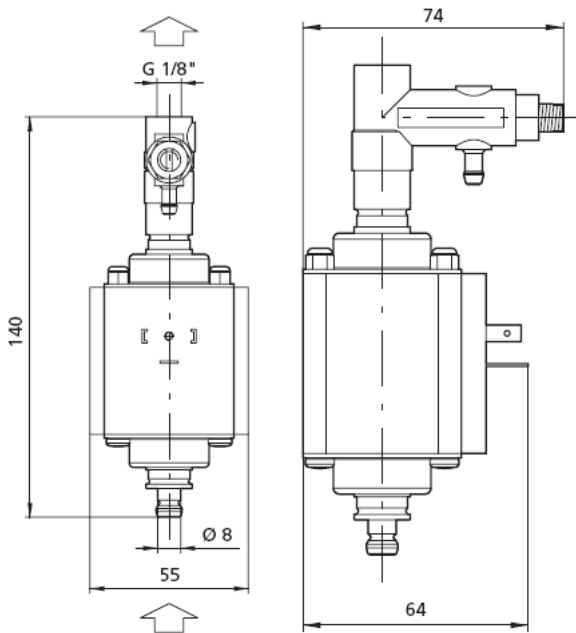


### Technical Specifications

- + Self-priming
- + Max viscosity: 400 Cst
- + pH range: 6-8
- + Max liquid temperature: 50°C (122°F)
- + No dry running allowed

(PSI)	"IF" Coil	"IL" Coil
Voltage	120v	230v
Frequency	60Hz	50Hz
Power	70W	70W
Current	0.98A	0.65A

### Performance Data

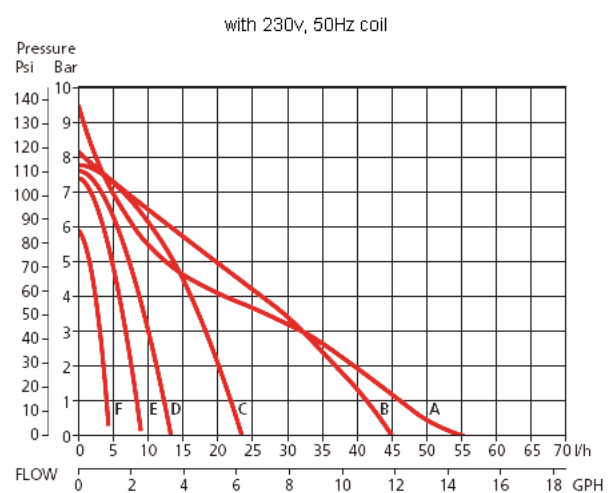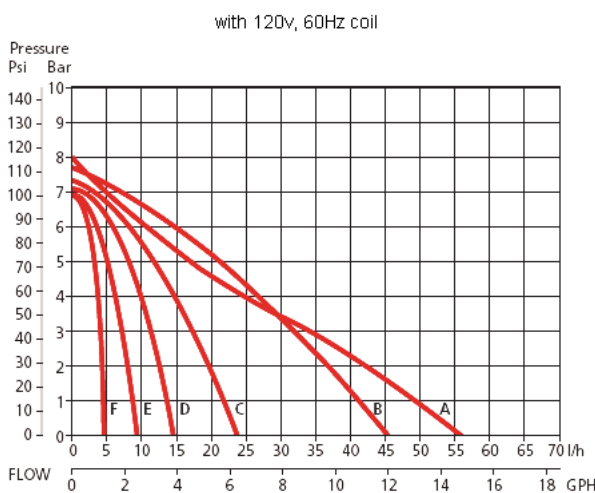

A = 1 cSt B = 26 cSt C = 95 cSt D = 210 cSt E = 290 cSt F = 400 cSt